

## Online Multi-Channel Fieldspec Spectroradiometer

### ATP9100-4CH

#### Features

- Four channels of spectrum can be monitored, such as : solar-skylight, 0° polarized, 30°, 45° reflected light
- Auto-Switch on four channels
- Fast scan a cycle of four channels within 5s
- Built-in Android system for field uses
- Light weight & flexible fiber probe design
- High accuracy, built-in with the second order sorting filter
- Dynamic dark current correction, reduce noise
- Water, Dust proof, damage resistant
- 4G/5G WiFi for auto-fast transfer data
- HD camera for taking spectrum area
- Directly calculate various vegetation indexes

#### Application

- Geographical Research, Mining exploration
- Remote Sensing Measure, Satellite remote sensing data calibration
- Agriculture, Crops Monitor
- Forestry & oceanography Research
- Meteorology, flux station

#### Description

ATP9100-4CH online Multi-channel fieldspec spectroradiometer (Fieldspec) is self-developed by Optosky. The range from 300~1100nm, built-in 4-channel detector. It used o collect reflected light on four directions of solar-skylight, 0° polarized, 30°, 45°, and it's applied to fields of remote sensing measurement, crops monitor, research of forest and oceanography etc.

ATP9100-4CH can output spectral signals by 4G module or RS485 communication interface , calculate and output Normalized Difference Vegetation Index(NDVI), Red-Edge Normalized Difference Vegetation Index(RNDVI), Plant Senescence Reflectance Index (PSRI), Photochemical Reflectance Index(PRT), Structure Insensitive Pigment Index (SIPI) , Carotenoid Reflectance Index(CRI), Anthocyanin Reflectance Index (ARI) .

It employs high performance, fast and accurate measurement, easy to operate and take to field etc. It's configured powerful software package, and applied to measurement of reflectance, radiometry, photometry and colorimetry.

Model	Feature
ATP9100-4CH	Multi-channel online fieldspec spectroradiometer






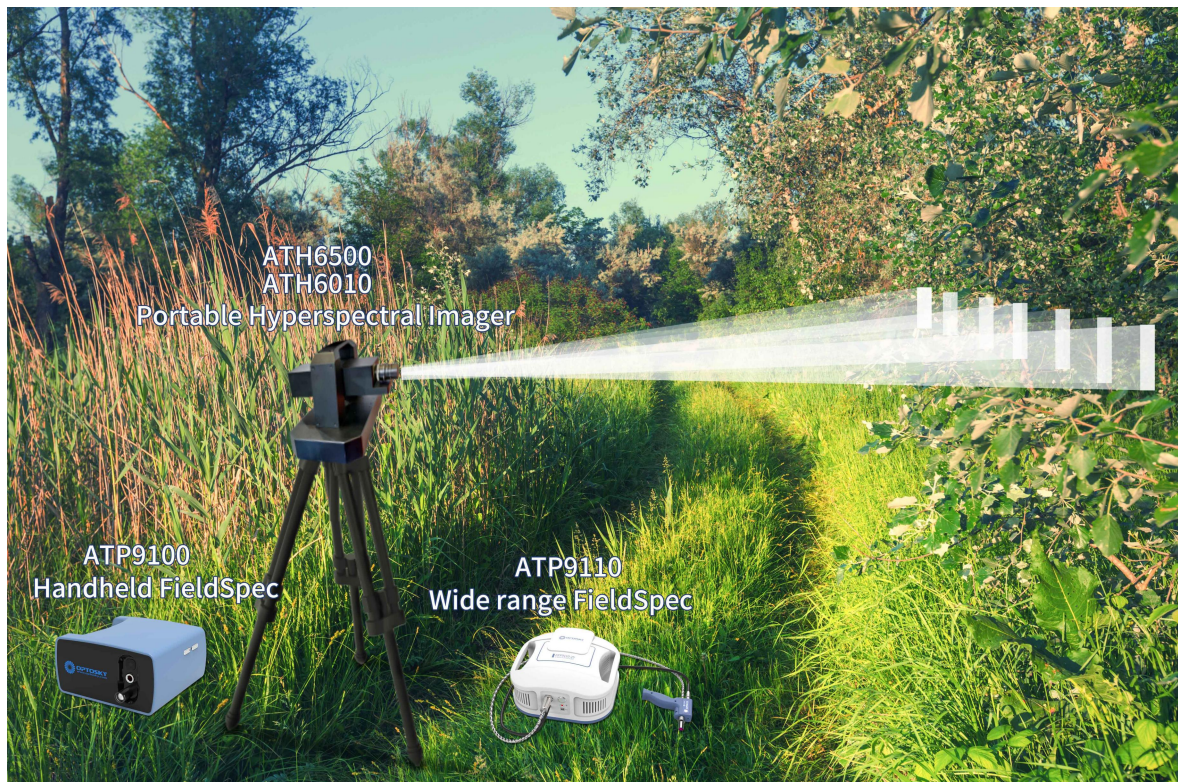



Fig 1 FieldSpec & Hyperspec co work in the field

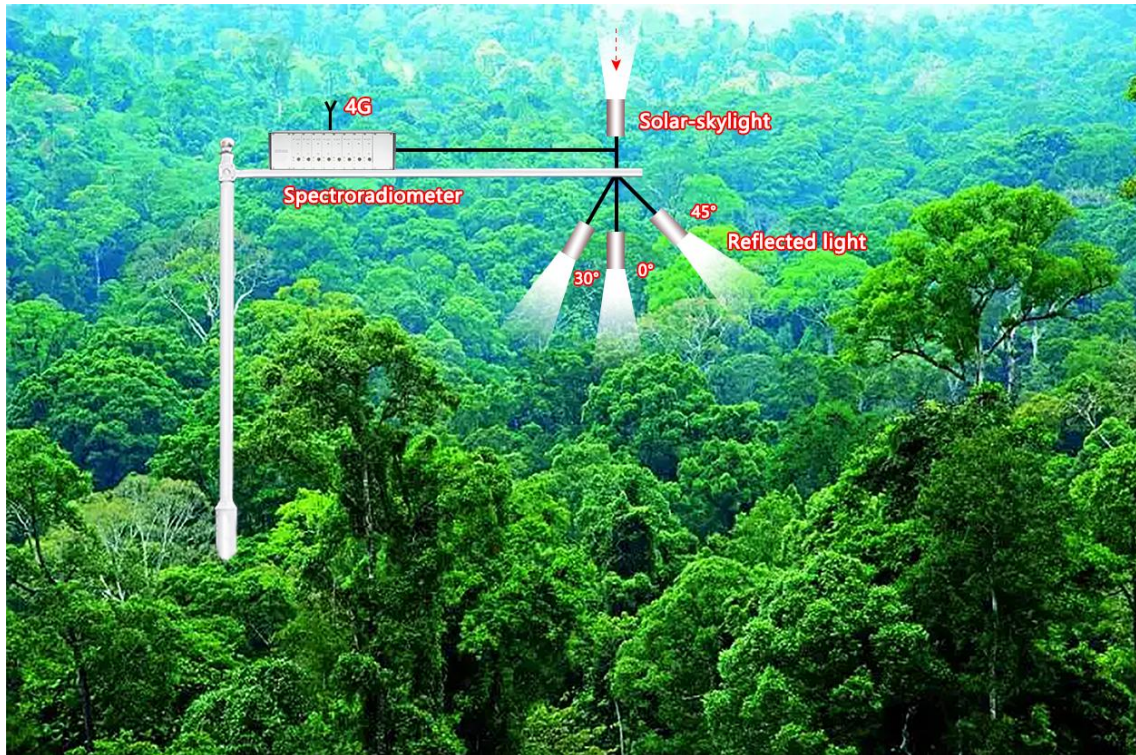

## 1. Performance

Detector	
Type	Deep-cooling high SNR detector
Detector	2048pixels
Optical Parameters	
Probe Number	Four channels
Spectral Range	300- 1100nm, 300-1700nm /300-2500nm optional
Length of fiber between probe and controller	3m, other lengths can be customized, up to 100m
Wavelength Accuracy	± 0.5nm
Spectral Resolution	1.4nm@756nm
FOV	narrow FOV lens , 1°/8°/ 15°/25°optional
SNR	>800
Spectral Sampling Interval	0.4nm
Channel rotation cycle	5s
Hardware spectral average	Max. up to 100,000 times
Plant parameter output	Normalized Difference Vegetation Index (NDVI)
	Red-Edge Normalized Difference Vegetation Index (RNDVI)
	Plant Senescence Reflectance Index (PSRI)
	Photochemical Reflectance Index (PRT)
	Structure Insensitive Pigment Index (SIPI)
	Carotenoid Reflectance Index (CRI)
	Anthocyanin Reflectance Index (ARI)
Electrical parameters	
Operation system	Android 6.0
Camera	13-mega front camera
LCD Screen	5"HD 720*1080 capacitive screen
Integration Time	1 – 10 s/ auto optimization integration time
Data Output Interface	4G/5G, RS485
Power supply	12VDC, 5A, solar power system optional
Working Current	<800mA
Storage Temp.	-20°C ~ +65°C
Operating Temp.	- 30 ~ 55 °C
LCD Operating Temp.	~10 to 45 °C
Working Humidity	< 90%RH, Non-condensate
Physical Parameters	
IP level	IP65
Dimension	265×175×175mm
Weight	3.5Kg

## 2. FieldSpec Pictures

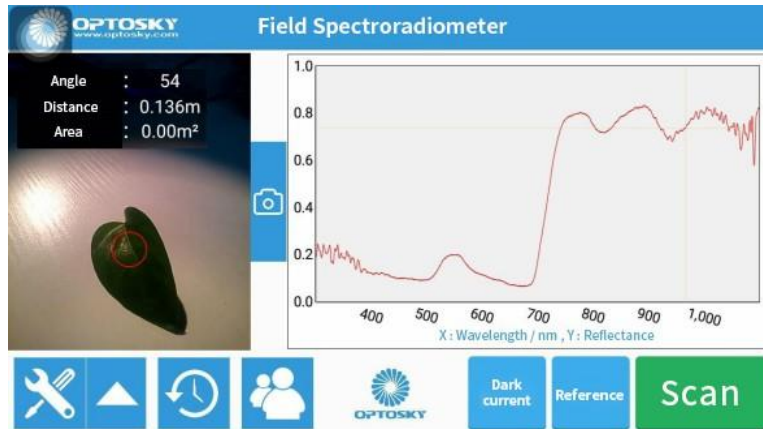

pectrum

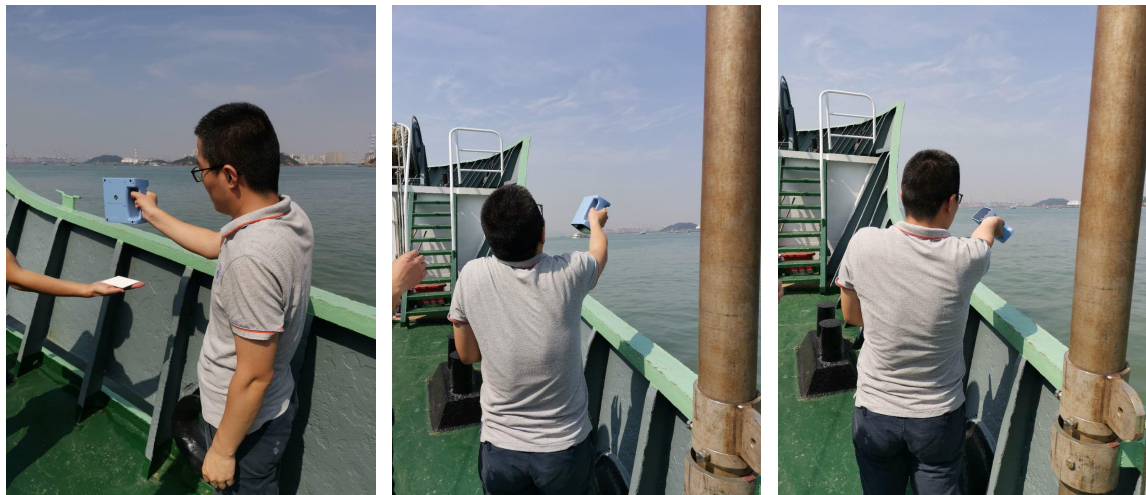


Fig 3 FieldSpec measurement case “Red Tide” on the ship on May 11-16, 2020



Fig 4 ATP9100 FieldSpec measurement case in the field

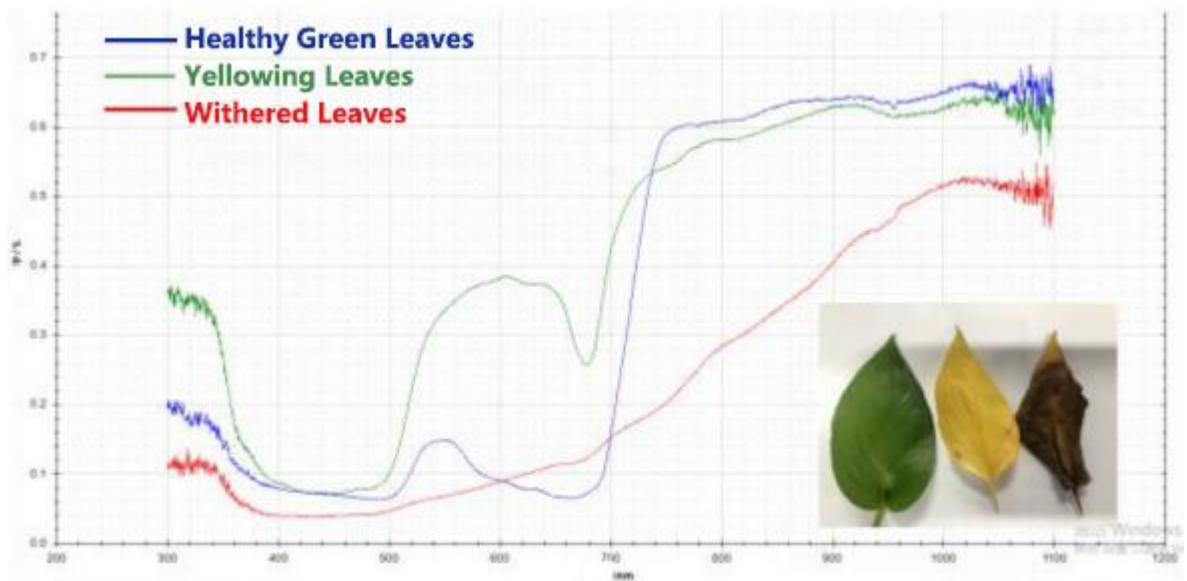


Fig 5 ATP9100 FieldSpec measure Healthy, yellowing and withered leaves

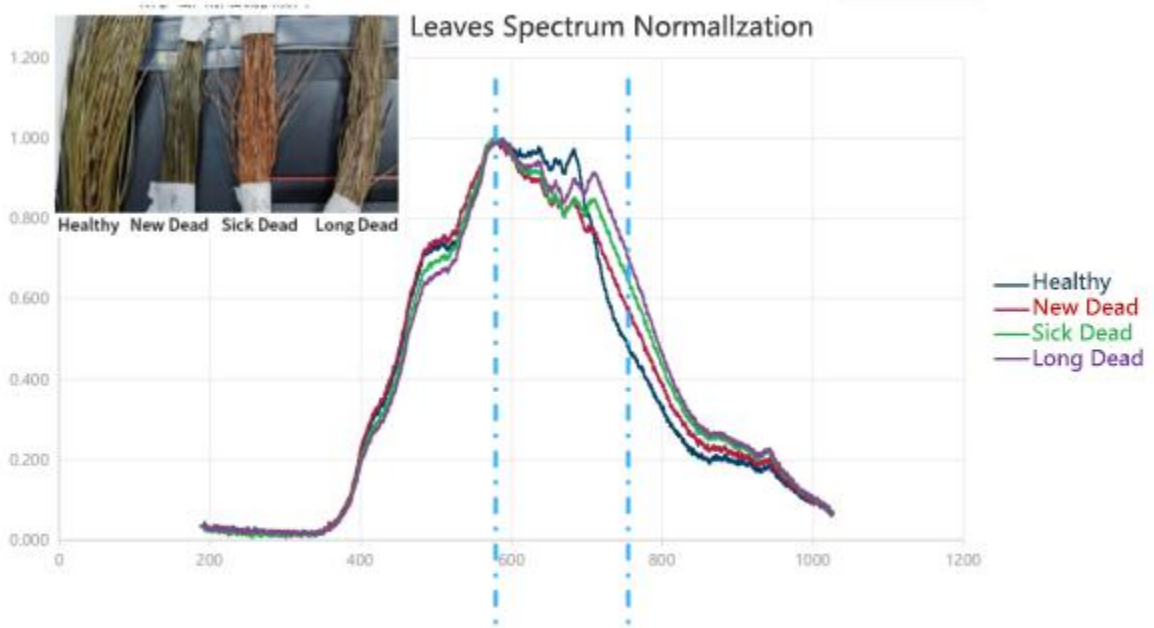


Fig 6 ATP9100 FieldSpec measures Healthy, dead, sick dead, dead long time branches



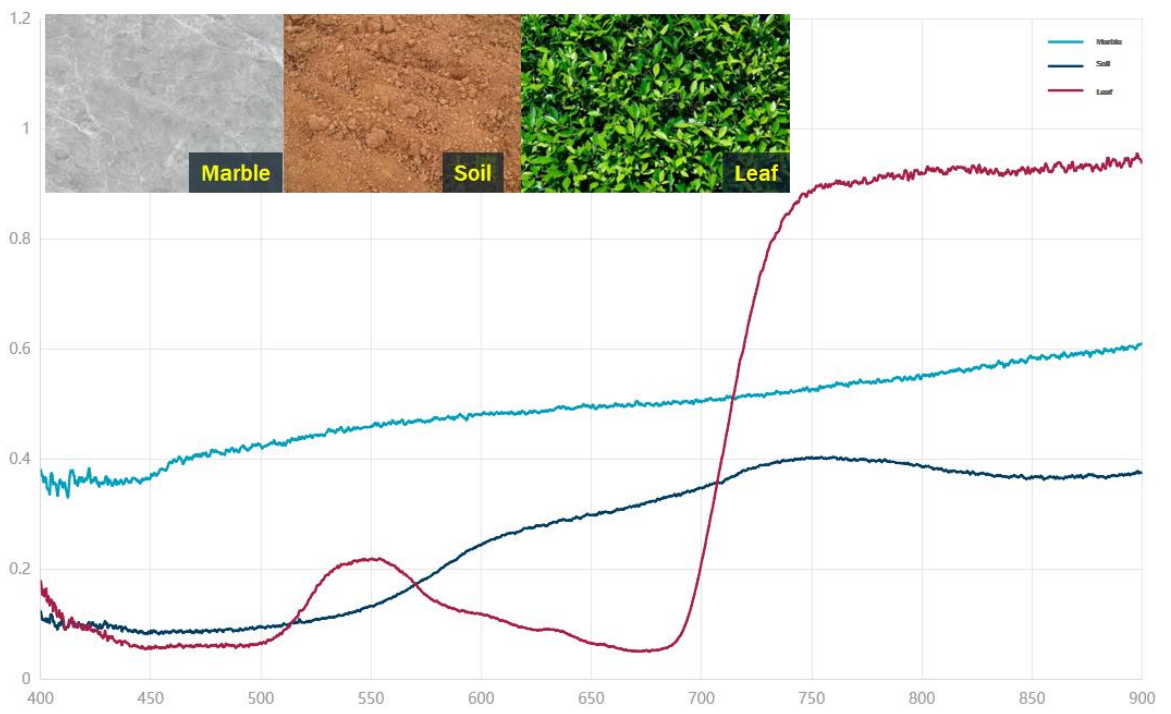


Fig 7 ATP9100 measure marble, soil, and leaves spectra



ATP9100-4CH

## 3. Attachment

Standard Attachment	
1	USB Data wire
2	Field fiber patch cable

Product data information is current as of publication data. Products conform to specifications per the terms of Optosky Standard warranty.

3	Exclusive PC software
4	Charging adaptor 5V/3A
5	Cosine lens
6	FOV 25°
7	Standard Board with box
8	Carry case
<b>Optional Attachment</b>	
1	FOV lens, 1°/5°/8°/10°/15° Optional
2	Reflectance Probe+leave clip for Reflectance measurement
4	Halogen lamp /ATG1021 INT:12V
5	Measure holder+integration sphere for transmittance measurement
6	Cuvette holder for water quality absorbance measurement
7	Standard white board 99% Reflectance 10cm*10cm (Customized)
8	White Board 60% Reflectance 10cm*10cm (Customized)

## 4. Application

### 4.1. FieldSpec applied to Oceanic and Water Quality

Red tide is an ecological abnormal phenomenon caused by the sudden proliferation or accumulation of certain phytoplankton, protozoa or bacteria in the seawater in a short period of time under certain environmental conditions. In recent years, toxic red tides have occurred frequently and have been expanding in scale, seriously affecting coastal fisheries, aquaculture and marine ecological environment. Red tide toxins also threaten the safety of human life.

Marine Phaeosporium, Skeletonema costatum, and Leptophyllum denmark are three types of phytoplankton that cause red tides. Red worms are currently the only reported protozoa that can form red tides. They are colorless and feed on phytoplankton. ; Phytoplankton pigments (mainly chlorophyll, carotene and other ancillary pigments), inorganic suspended particulate matter, and colored dissolved organic matter are the three major factors that determine the optical properties of seawater, which together affect the ocean's out-of-water radiation information (such as remote sensing reflectance spectroscopy) ), considering the spectral properties of these three aquatic elements. From the perspective of spectral morphology, in the range of 400~900 nm, different types of red tide spectra show obvious bimodal distributions, especially the second reflection at 687~728nm. The peak is the characteristic reflection peak that distinguishes the red tide water spectrum from the normal sea water spectrum. This has been successfully used in the red tide detection algorithm based on aerial hyperspectral remote sensing.

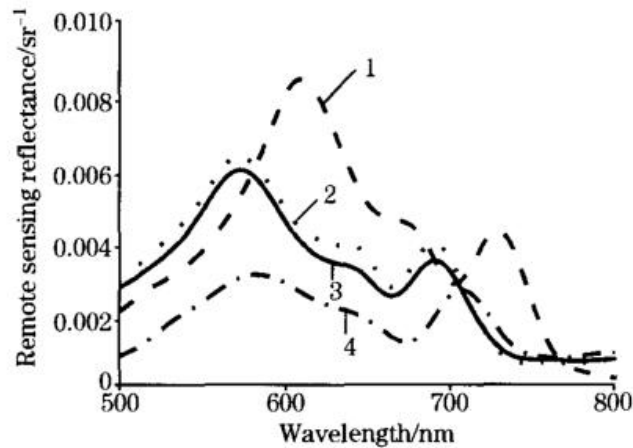


Fig 8 Spectra of different types of red tide 1: Red worms; 2: Skeletonema costatum; 3: Leptocylindrica denmark; 4: Marine Phaeosporium

1) The relatively high concentration of inorganic suspended matter is the main reason for the first reflection peak at 570~585 nm. Due to its strong light scattering effect, the reflection peak of chlorophyll at 550 nm is obliterated, making it invisible from the spectral curve. The ground shows that the appearance of higher concentration of inorganic suspended matter is directly related to the nearshore of the experimental sea area.

2) Phycocyanin (Phycocyanin), an accessory pigment, absorbs at 615~630nm to form a shoulder peak of the reflection spectrum near the wavelength of 640 nm.

3) The absorption peak near 670 nm originates from the strong absorption of chlorophyll.

4) The second reflection peak of the red tide water spectrum has nothing to do with the presence and content of yellow substances and suspended sediments, and is attributed to the fluorescence characteristics of chlorophyll in this band.

5) In the previous ocean optics research, it is generally believed that the fluorescence peak of chlorophyll is at 685nm. In recent years, experimental observations and spectral simulation studies have shown that as the concentration of chlorophyll a increases, the fluorescence peak intensity increases at the same time that the fluorescence peak The emission wavelength will also be red-shifted.

6) The small reflection peak of the spectral curve near 800 nm is caused because pure water has a minimum value of absorption in this waveband.

ATP9100 handheld hyperspectral surface object spectrometer (field spectroradiometer) is the latest product of Optosky, with a wavelength range of 300~1100 nm, suitable for remote sensing measurement, crop monitoring, forest research to oceanographic research, etc. Application in various fields.

ATP9100 ground feature spectrometer has the characteristics of high cost performance, fast and accurate measurement, simple operation and convenient carrying. It is equipped with a powerful software package. In addition to reflectivity measurement, it can also be used for radiometry, photometry and colorimetry. . In April 2020, along with Xiamen University Jiageng in Sanduao waters of Ningde, the red tide was successfully monitored, and the direction of the



red tide was judged based on the distribution maps monitored at different times, and the red tide warning was successfully carried out.

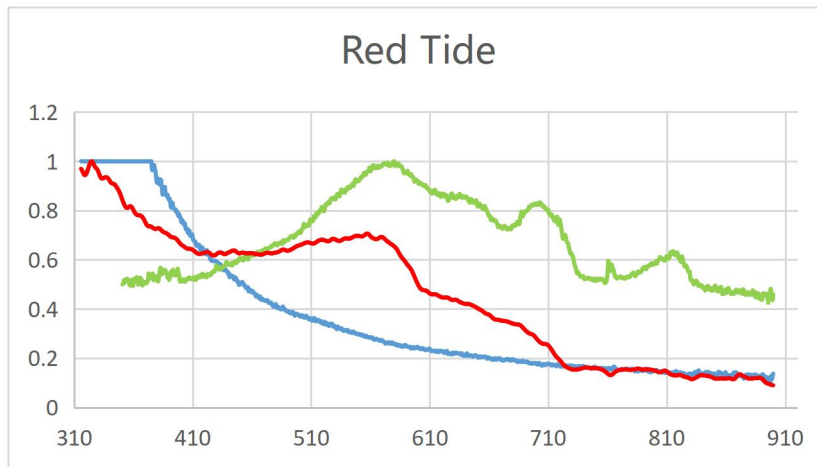
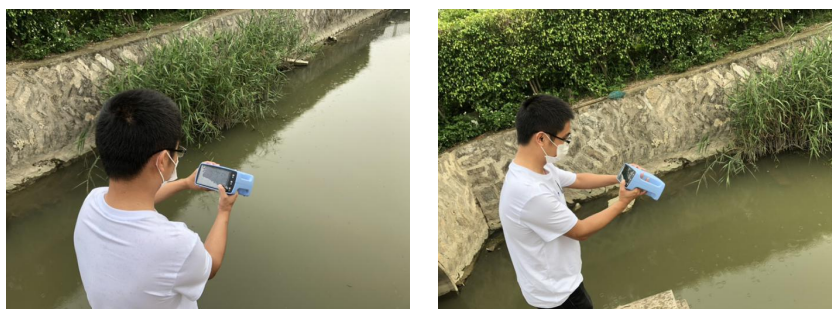


Fig 9 ATP9100 measure spectra of sky, lake and red tide



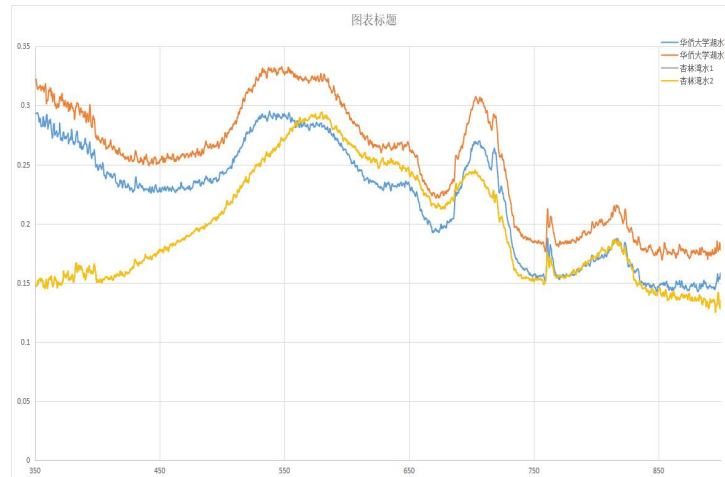


Fig 10 ATP9100 measure lake water color

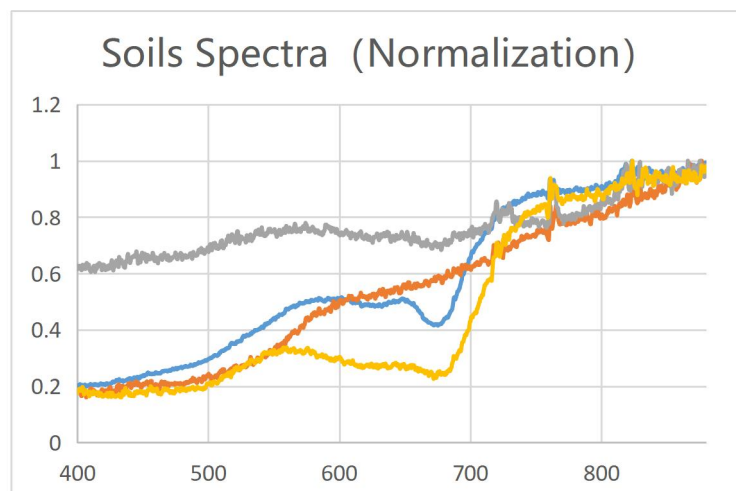


Fig 11 ATP9100 measure soils, blue is normal soil, red is red soil, grey is polluted soil, yellow is moss soil

## 4.2. FieldSpec applied to agriculture

Nitrogen is one of the main limiting factors for crop yield and economic benefits in arid regions. Nitrogen nutrition index (NNI) can effectively judge the abundance and deficiency of nitrogen nutrition in each growth period of crops. Using hyperspectral remote sensing technology to quickly and accurately diagnose the nitrogen nutrition status of drip-irrigated cotton fields, and then optimize the nitrogen supply in

each growth period of the crop is a key measure to improve the nitrogen fertilizer use efficiency of the crop and improve the soil environment. With the maturity of hyperspectral technology, the application of hyperspectral technology and algorithms to retrieve crop leaf nitrogen content, chlorophyll concentration, leaf area, biomass and other physiological and biochemical parameters is currently the main method to study the nitrogen nutrition status of cotton. However, these parameters will vary due to differences in growth period, canopy density, plant morphology, climate and light. In addition, the above-mentioned parameters can only give a relatively rough understanding of the nutrient status of cotton, and cannot give a qualitative judgment on the degree of its nutrient deficiency and overnutrition. The vegetation index is highly sensitive to nitrogen and is less disturbed by other factors. Therefore, the change of the vegetation index can be used to predict the change of nitrogen, and the nitrogen nutrition index is more closely combined with the nitrogen content, so the nitrogen nutrition index is monitored. The changes can accurately monitor the nitrogen nutrition status of the plants.



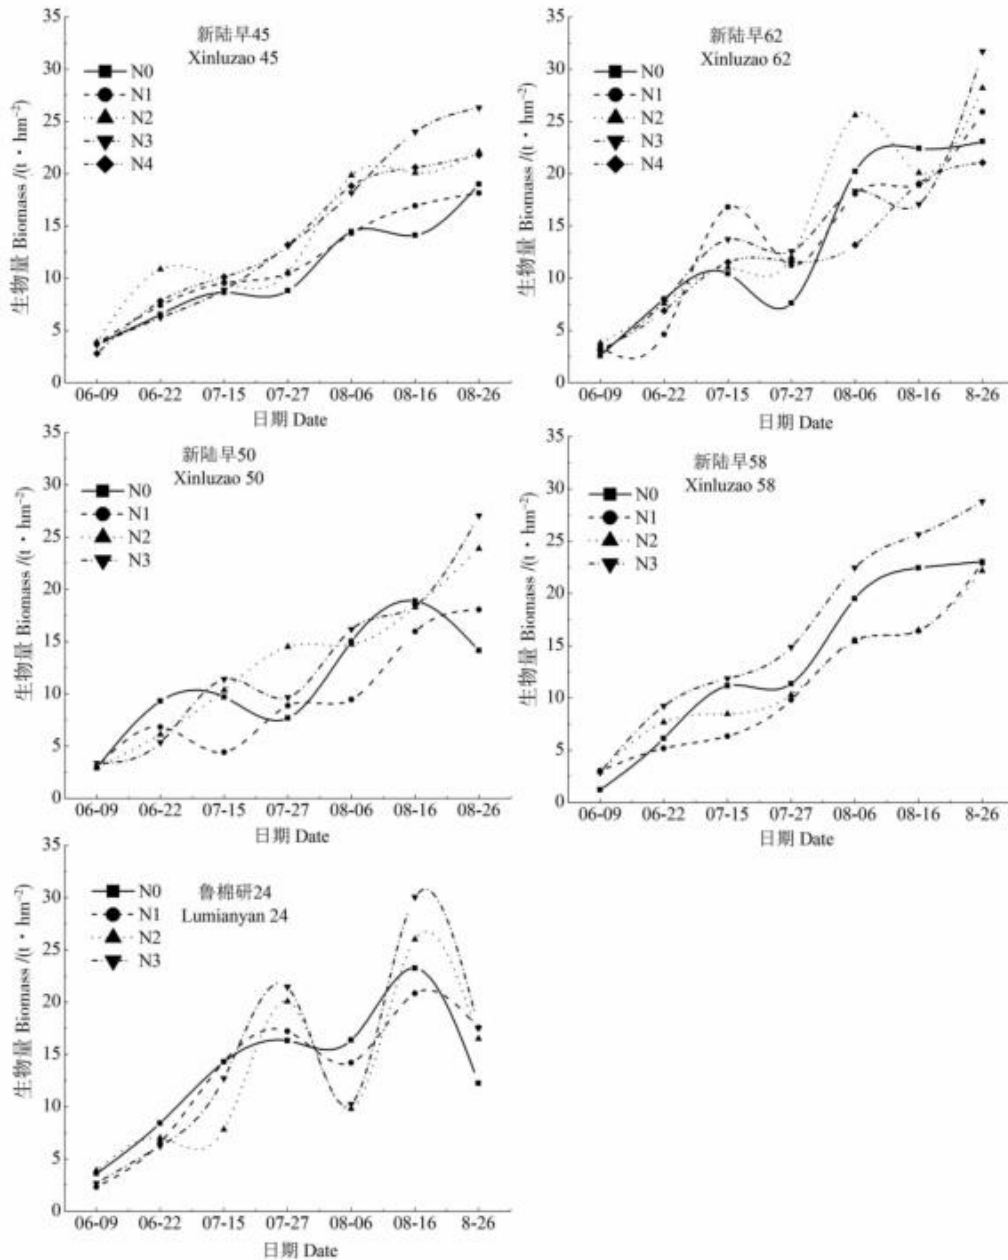


Fig 12 Cotton growth period biomass spectra

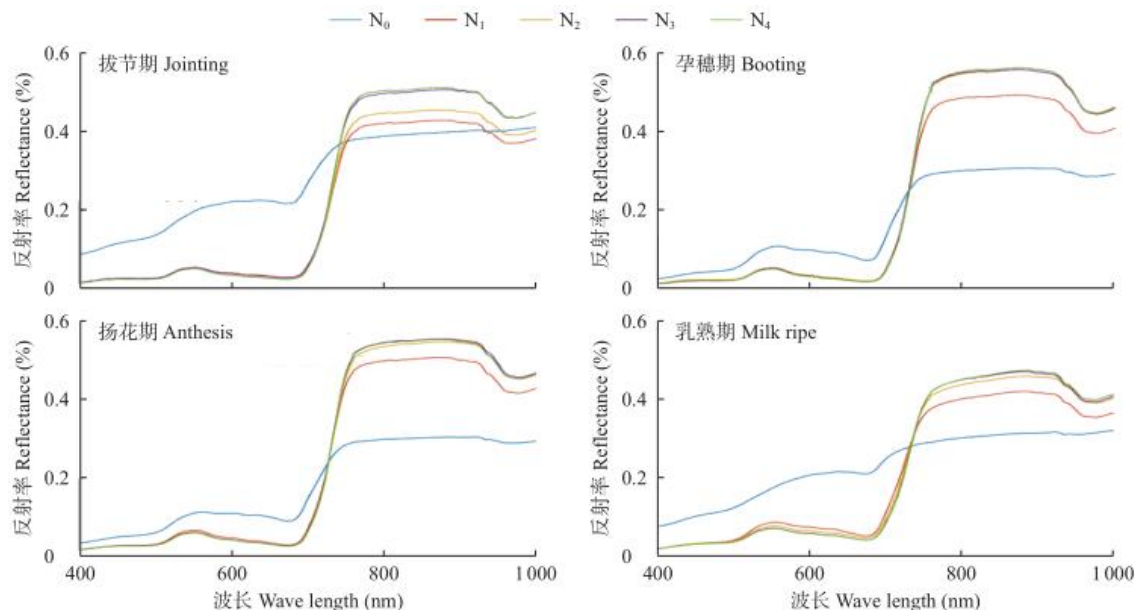


Fig 13 Winter wheat canopy reflectance spectra

Make full use of the advantages of reflectance spectrum data in monitoring physiological and biochemical parameters and the advantages of canopy SIF data in monitoring the photosynthetic physiological state of vegetation, and integrate the reflectance spectrum data with canopy SIF data to invert the incidence of wheat stripe rust. Through the comparative analysis of the experimental data, it is concluded that the accuracy of the monitoring model for wheat stripe rust constructed by synergistic reflectance spectral data and canopy SIF data is higher than that of the monitoring model constructed by reflectance spectral data.

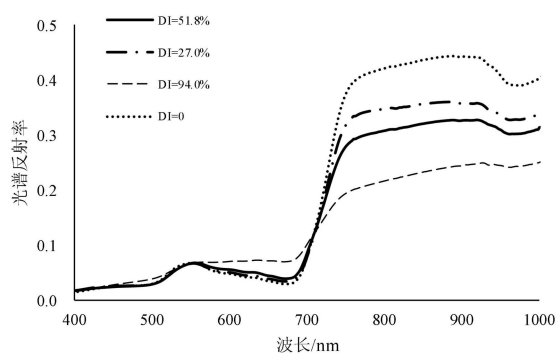


Fig 14 The original curve of the canopy spectrum of different wheat stalk disease severity, combined with the reflectance spectrum data and the canopy SIF data, can improve the monitoring accuracy of the wheat stalk disease severity. The right is SIF detector developed by OPTOSKY

## 5. FieldSpec Series Model

Fig 15 FieldSpec & Hyperspectral Series




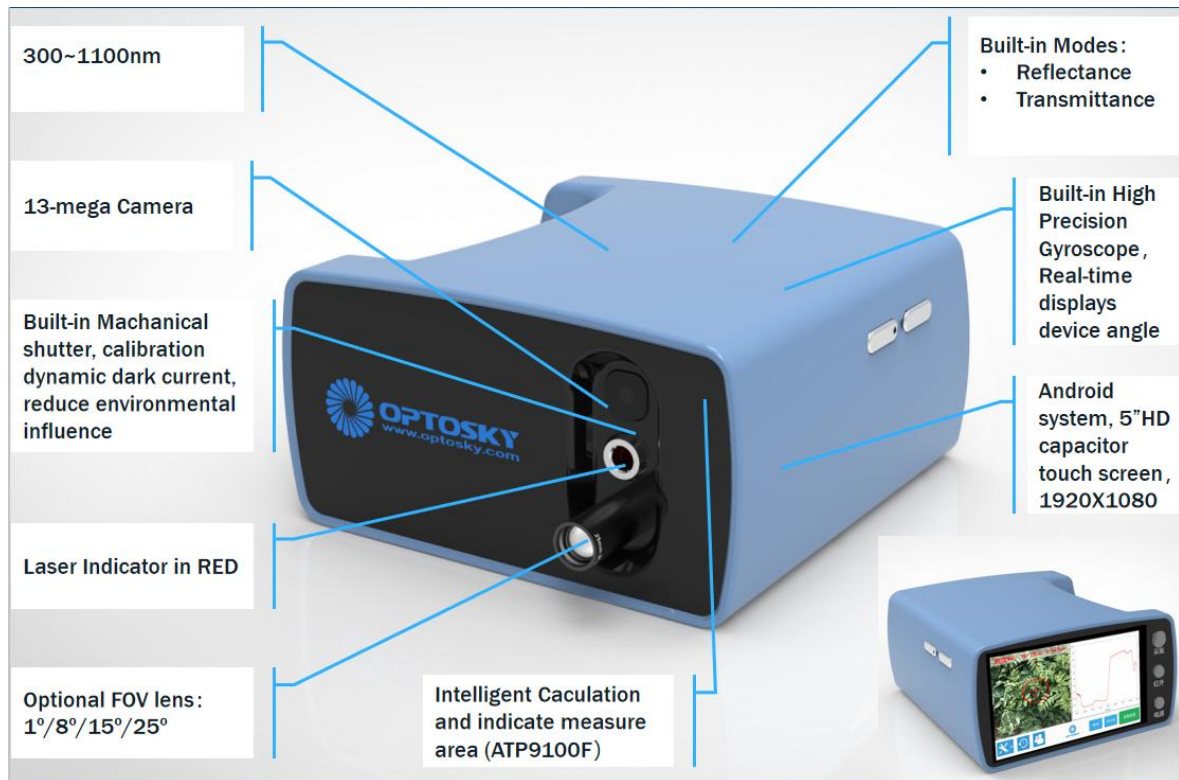
		
<p><b>ATP9100</b> Handheld Field Spec (300-1100nm)</p>	<p><b>ATP9101</b> Miniature Field Spec (400-1100nm)</p>	<p><b>ATP9110 Portable Field Spec</b></p>
<ul style="list-style-type: none"> <li>• Pixels: 2048 pixels;</li> <li>• High Resolution:1.5 nm;</li> <li>• Wavelength Sampling Interval: 0.4 nm</li> <li>• 5.5" Touch Screen;</li> <li>• Laser point to;</li> <li>• 13-mega auto-focus HD camera;</li> <li>• Built-in Li-battery, life span&gt;6hrs;</li> </ul>	<ul style="list-style-type: none"> <li>• Pixels: 1024Pixels;</li> <li>• High Resolution:2.5 nm;</li> <li>• Weight: 120 g;</li> <li>• Laser point to;</li> <li>• Built-in Li battery, life span&gt;5hrs;</li> <li>• Bluetooth;</li> </ul>	<ul style="list-style-type: none"> <li>• ATP9110-25: 300-2500nm</li> <li>• ATP9110H-25: 300-2500nm</li> <li>• ATP9110-17: 300-1700 nm</li> <li>• ATP9110-50: 300nm-5µm</li> <li>• ATP9110-110: 300nm-11µm</li> <li>• Total Pixels: 3072pixels;</li> <li>• High Resolution:1.5-5 nm;</li> <li>• Cooled Back-illuminated CCD</li> <li>• II Class InGaAs CCD;</li> <li>• Auto dynamic dark current calibrate</li> <li>• Auto wavelength shift lock function</li> </ul>

Fig 16 FieldSpec Models Guide



**300~1100nm**

**13-mega Camera**

**Built-in Mechanical shutter, calibration dynamic dark current, reduce environmental influence**

**Laser Indicator in RED**

**Optional FOV lens: 1°/8°/15°/25°**

**Built-in Modes:**

- Reflectance
- Transmittance

**Built-in High Precision Gyroscope, Real-time displays device angle**

**Android system, 5"HD capacitor touch screen, 1920X1080**

**Intelligent Calculation and indicate measure area (ATP9100F)**

Fig 17 ATP9100 & ATP9100F Introduction



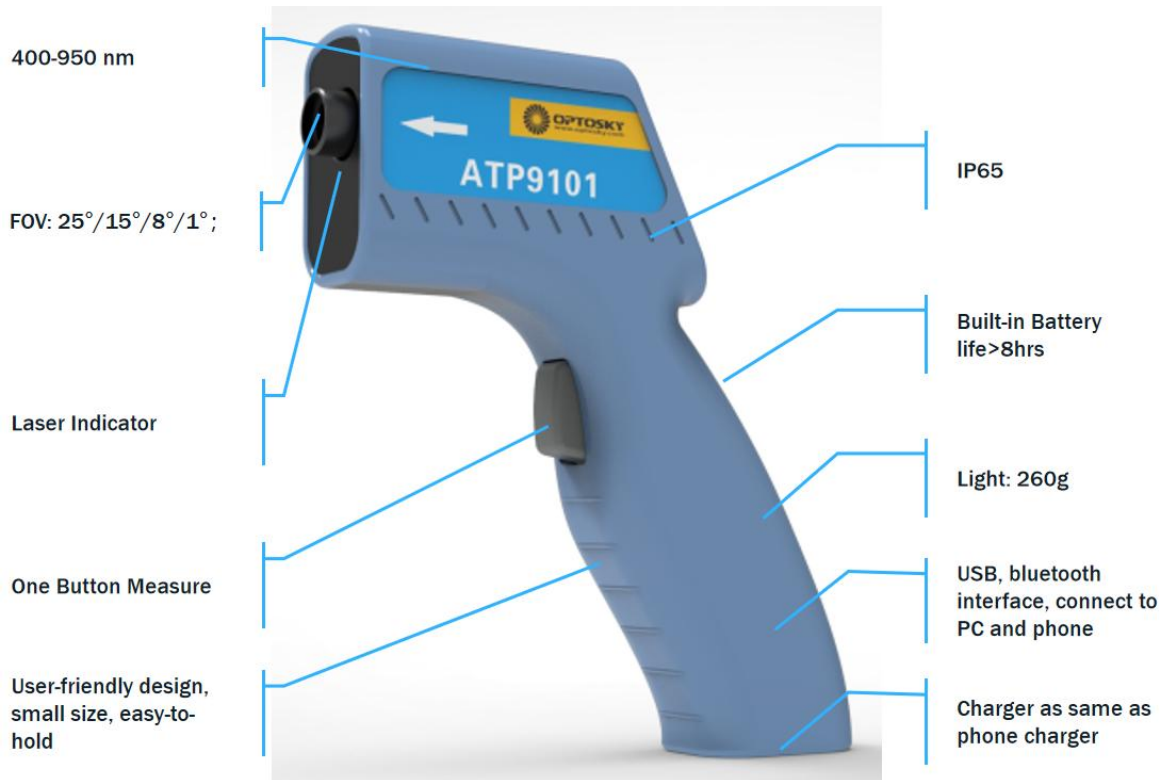


Fig 18 ATP9101 introduction

## ATP9110 Full-Range FieldSpec Spectroradiometer

300-2500 nm | High Stability | Fast Scan | Replaceable Battery | Light & Portable

<p><b>Wavelength range:</b> 300 - 2500 nm</p>		<p><b>Detector</b> Si CCD Deep cooled InGaAs</p>	<p><b>Module</b></p> <ul style="list-style-type: none"> <li>• High precision Gyroscope;</li> <li>• GPS positioning system;</li> <li>• Replaceable battery</li> </ul>
<p><b>Interface</b></p> <ul style="list-style-type: none"> <li>• USB</li> </ul>		<p><b>Size &amp; Weight</b></p> <ul style="list-style-type: none"> <li>• 290×260×141mm</li> <li>• Weight: 5.6 Kg</li> </ul>	<p><b>Advantage:</b></p> <ul style="list-style-type: none"> <li>• High Sensitivity, Detector quantum efficiency up to 90%;</li> <li>• Fastest Measure Speed, sampling time &lt;20s;</li> <li>• Fiber probe measure features light weight and flexibility;</li> <li>• Built-in second order sorting coating film &amp; filter, high accuracy;</li> <li>• Dynamic dark current calibration, reduce thermal noise ;</li> </ul>
<p><b>Application</b></p> <ul style="list-style-type: none"> <li>• Geological , Minery</li> <li>• Remote Sensing</li> <li>• Plant Monitor</li> <li>• Forest, Oceanography</li> </ul>			
<p><b>300 - 2500 nm</b></p>			
<p>www.optosky.net      +86-592-6102588      sales@optosky.com</p>			

Fig 19 ATP9110 Introduction

## 1. Company Profile

Optosky company has been providing first-class spectroscopy solution with 20 year, with the headquarter covers a area of 2500 square meter with 50 engineers in Xiamen city where held the international 9<sup>th</sup> BRICK summit in 2017. Another R&D research centers locates in Wuhu city with 30 engineers covering an area of 2035 square meters.

The company founder & CEO Dr.Hongfei,Liu received Doctor degree in Chinese Academic of Science and postdoctoral degree in Xiamen University, by cooperating with two top Universities' spectroscopy technology to integrate into Optosky company aiming at developing global leading spectroscopy solution provider.

The company technology bases on Optomechatronics, Spectroscopy Analysis, Process Weak Optical and Electrical Signals, Cloud Computing, and have been developed wide products line of Raman spectroscopy products, micro spectrometer, hyperspectral imager, field spectroradiometer, fluorescence spectroscopy, LIBS etc. Driven by advanced technologies and products, Optosky brand has been well-known to customers all over the world.

Optosky company base on technology innovation, market-driven innovation, customer first, provides first-class products and services, and one-stop solutions to many fortune 500 companies in many industries. The company received praise from leading industrial companies, as well as many innovative intellectual properties, software copyright, qualification certification, and winner awards over hundred numbers.The company has received over 26 IPs, 35 innovative patents, and 32 copy rights.

Optosky receives top class A introduced the high-tech company to international Xiamen city, the national high-tech and new innovative technology company award. The founder Dr.Hongfei Liu receives the innovation talent award by the ministry of science and technology.

The company is currently conducting the exclusive project of major industrialization national oceanic administration with a total fund of five million US dollars. Optosky company in charge of drafting 7 Chinese National Standards (GB) , including VNIR and SWNIR Field Spectroradiometer, Hazmat detector based on Raman spectroscopy, Buoy-type Monitor eco-environment, water quality monitor in the unmanned vessel, online water quality monitor by spectroscopy, UV-absorbent measure fabrics etc.

Optosky company received ISO9001:2015 certification, CE certification, Police Administration Certification, FDA approval compliant, IQOQPQ compliant.

---



Figure 1 Optosky (Xiamen) Photonics Inc. Company Headquarter

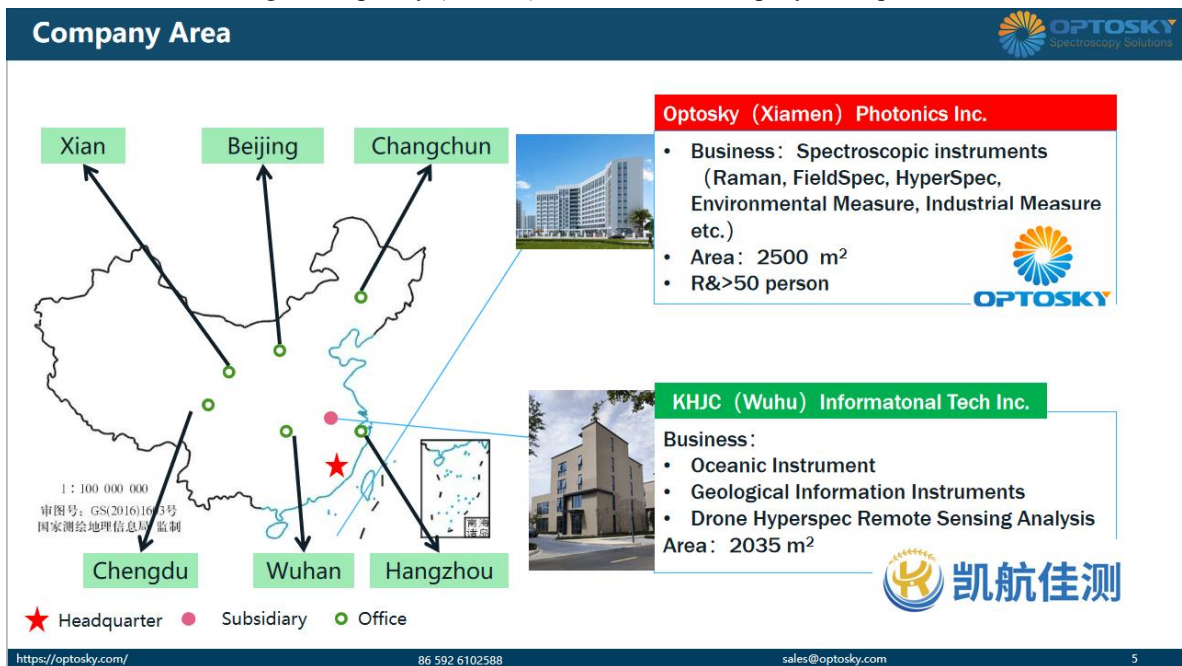


Figure 2 Optosky Company Area



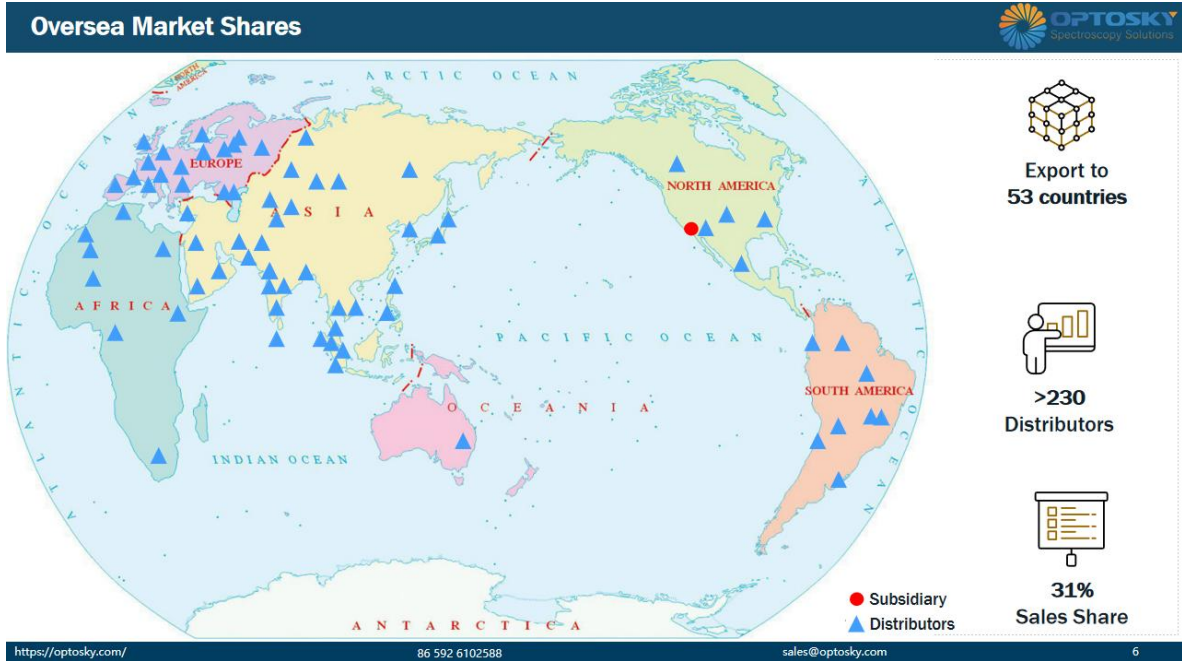


Figure 3 Overseas Market Shares



Figure 4 Optosky Chair and Draft National Standards Lists.

Qualification



 <b>ISO9001:2005</b>	 <b>GB/T 23001</b> Informationization & Innovation	 <b>CE, RoHS, LVD</b> 17 models	 <b>Police Approval</b> 11 models
 <b>GB/T 29490</b> IP implementation	 <b>5 Innovative patents</b>	 <b>35 patents</b> new utility design	 <b>32 Software copyright</b>

https://optosky.com/
sales@optosky.com
14

Figure 5 Qualification

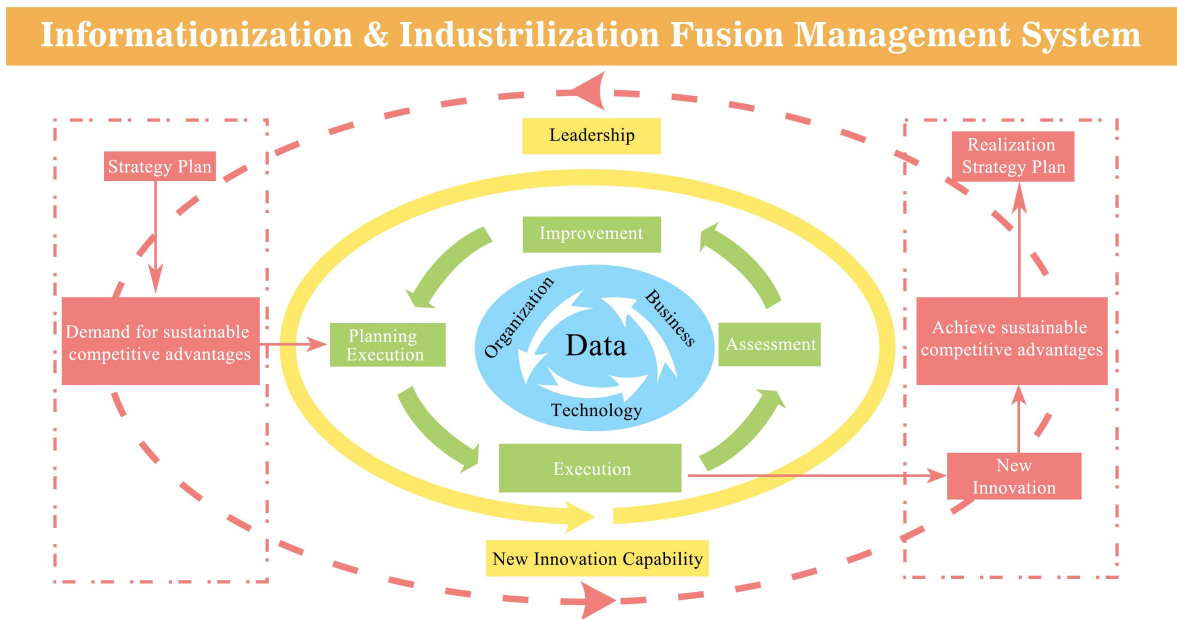


Figure 6 GB/T 23001\_Informationization & Industrilization Fusion Management System

## Co-Founder—Dr. Hongfei Liu



### Postdoctoral Hongfei Liu

- Selected "Innovative Talent" by Science and Technology ministry
- Top Class A Talent by Xiamen City
- CCTV Science & Technology Interview
- Fortune 500 experience in Agilent, II-VI

### Honors

- Selected by science & technology ministry as "Innovation Talent"
- CCTV Science & Technology Interview
- Top Class A Talent credited by Xiamen City
- **Innovation Hero**

### Education

- PhD • Chinese Science of Academic • Prof. Gui-Lin Chen, Originator in spectroscopy
- Postdoctoral • Xiamen University • Prof. Zhong-Qun Tian guided by the SERS founder M.Fleischmann

### Career

- Engineer → R&D Manager → GM
- **Agilent**, Leader of instrument, Fortune 500 company, Job: engineer
- II- VI Incorporated (Nasdaq: IIVI) leader in optical & electrical industries, Job: GM of Instrumentation and Automation

### Academic

- University graduate tutor
- obtain more than 60 IPs, more than 10 Innovation patents;
- Publish more than 20 papers, 2 recorded SCI, 8 recorded EI



Selected "Innovative Talent" by Science and Technology ministry



Top Class A Talent by Xiamen City



Founder & Tutors

<https://optosky.com/>

86 592 6102588

[sales@optosky.com](mailto:sales@optosky.com)


9

Figure 7 Optosky's Co-founder\_Dr. Hongfei Liu


## Category & Application



### Category

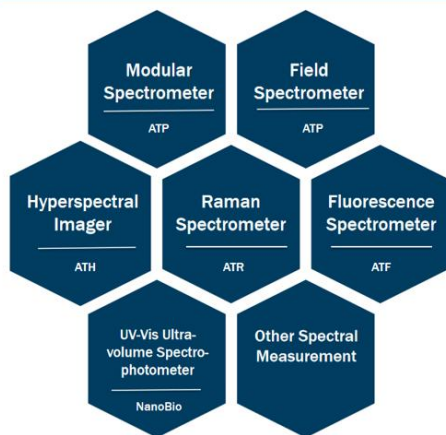

### Application

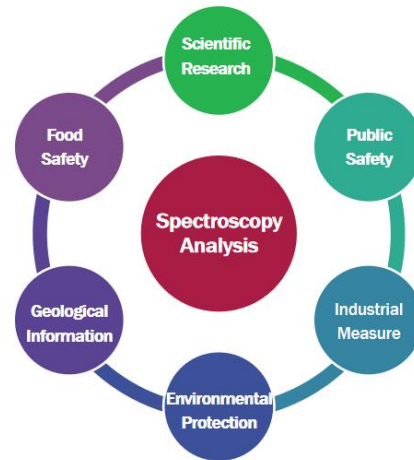

<https://optosky.com/>


86 592 6102588

[sales@optosky.com](mailto:sales@optosky.com)

15


Figure 8 Category & Application



**Model Name Rule**


**Model Name Rule:**

- Prefix
- Category
- Model
- Suffix

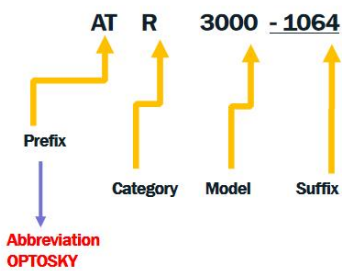

- **ATR** - Raman Spectrometer
- **ATP** - Micro Spectrometer
- **ATH** - Hyperspectral Imager
- **ATF** - Micro Fluorescence Spectrometer
- **ATL** - LIBS
- **ATW** - Water
- **ATE** - Environment Protect
- **ATFD** - Food Safety
- **GA** - Public Safety (**Gong An**)
- **GF** - Gas Monitor (**Gas Finder**)
- **GY** - Industrial Monitor (**Gong Ye**)

eg:

- Raman Microscope: ATR8300MP-1064
- Hyperspectral Imager: ATH9500

<https://optosky.com/>
86 592 6102588
sales@optosky.com
16

Figure 9 Model Name Rule